

Ground-Guards™

**“When you’ve got a
tough job to do...**

**Ground-Guards will help
you do it safely & profitably”**



from

SCOTT VICKERS

CONTENTS

- MultiTrack
- MultiTrack Specifications
- FastCover

MultiTrack



**120 TONNES
UNBREAKABLE*
GUARANTEED**
* See www.ground-guards.co.uk



Ground-Guards MultiTrack is the World's number one plastic temporary roadway system.

These lightweight unbreakable plastic panels are easy to lay out by hand, and join together with No-Tools joiner clips.

- Virtually indestructible high-tech plastic
- 2.4 x 1.2m panels weigh just 39kg
- Easily installed by hand without a hiab
- Quickly connect together using No-Tools joiners
- Avoid excavating for roadways.
- Guaranteed for life

***"If you can break it,
we'll replace it"***

* Ground-Guards MultiTrack are guaranteed unbreakable by vehicles up to 120 Tonnes. However, it is the user's responsibility to assess the load-bearing capacity of the ground, and to only operate vehicles within the weight that the ground is capable of safely supporting. Ground-Guards Ltd accepts no liability whatsoever for any damage, loss or injury arising from the ground conditions on which these products are used.

Ground-Guards are not suitable to use for bridging purposes.

MultiTrack




SafeStore galvanised stillages for safe and easy transportation and storage



Ground-Guards are quickly installed with No-Tools joiner clips

Ideal for:

- Temporary Roadways
- Car Parks
- Events
- Construction Access
- Tree Root Protection



Bolt-Together joiners



Handy-Hook for easily moving panels

OPTIONS

Roadway

Walkway

Smooth

CODE	SIZE	WEIGHT
GG48	4' x 8' (1.2 x 2.4m)	39kg
GG38	3' x 8' (0.9 x 2.4m)	29kg
GG28	2' x 8' (0.6 x 2.4m)	20kg
GG36	3' x 6' (0.9 x 1.8m)	22kg
GG26	2' x 6' (0.6 x 1.8m)	15kg

MultiTrack Specifications

Part Description

Ground-Guards MultiTrack ground protection mats. Diamond plate tread design for maximum traction on both sides.

Physical Characteristics

Length – 8' (2.44m)

Width – 4' (1.22m)

Thickness – 12.7mm main surface + 9.5mm cleat

Weight – 39 kg

Colour Options

Black – Naturally UV Resistant

White (Add'l charge) – With UV/AO protection

Customer Colour (Min Req. / Add'l charge)

Material

High Density Polyethylene (HDPE)

Post-Industrial Recycled

Weight Load Rating

Varies depending on sub-surface, equipment up to **120 tons**

Sub Surface

Ground-Guards were invented to be used on a variety of sub-surfaces, without additional preparation. Such surfaces include (but not limited to): grass, gravel, soil, concrete, asphalt, sand, & mud. Ground-Guards are not intended for use as bridging.

Linking System

Ground-Guards are designed to be easily linked together to form a “semi-permanent” road and/or surface. Ground-Guards can be linked on all four sides using our galvanized steel “Turn-a-Link” system. No tools are required to link Ground-Guards.

Shipping Considerations

Maximum 50 GG48/pallet

Maximum 263 GG48/20' Ocean Container

Maximum 500 GG48/40' Ocean Container


Warranty

Ground-Guards Ltd is proud to be the **ONLY** company to offer a limited **LIFETIME GUARANTEE**

Physical Properties

Test	ASTM	Typical Value	Units
Melt Index	D1238	<0.10	g/10min
Specific Gravity	D792	0.960	
Impact Strength	D256	4 - 5	ft-lbs/in
Flexural Modulus	D790	160,000	psi
Tensile Modulus	D638	150,000	psi
Tensile Yield Strength	D638	3,500	psi
Elongation @ Break	D638	240	%
Compressive Stress @ Yield	D695	2900	psi

FastCover

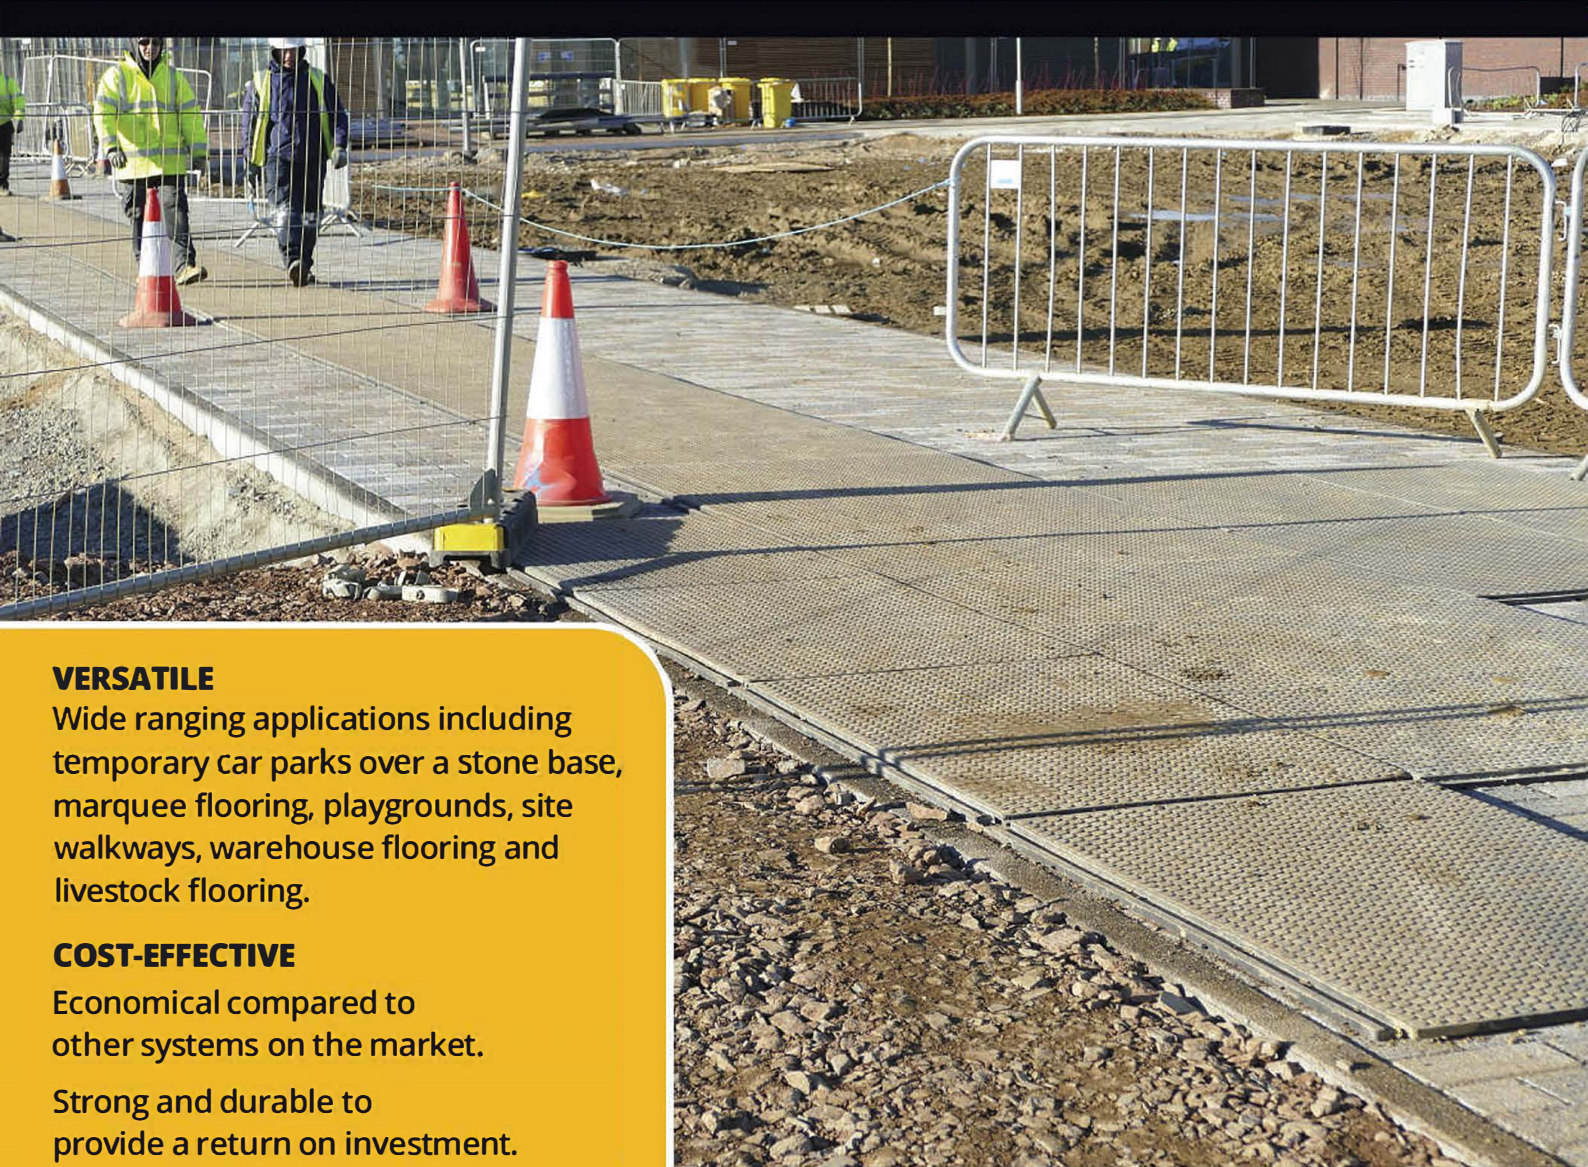

VERSATILE

Wide ranging applications including temporary car parks over a stone base, marquee flooring, playgrounds, site walkways, warehouse flooring and livestock flooring.

COST-EFFECTIVE

Economical compared to other systems on the market.

Strong and durable to provide a return on investment.

SAFE

Anti-slip surface eliminates trip hazards.

Interlocking lips enable smooth joins.


Gentle edging ramps provide a safe transition to ground level.

ENVIRONMENTALLY FRIENDLY

Made from 100% recycled PVC.

For cost-effective, easy to lay flooring that won't cost the earth, FastCover is the strong and versatile solution perfect for a range of challenging applications.

FastCover

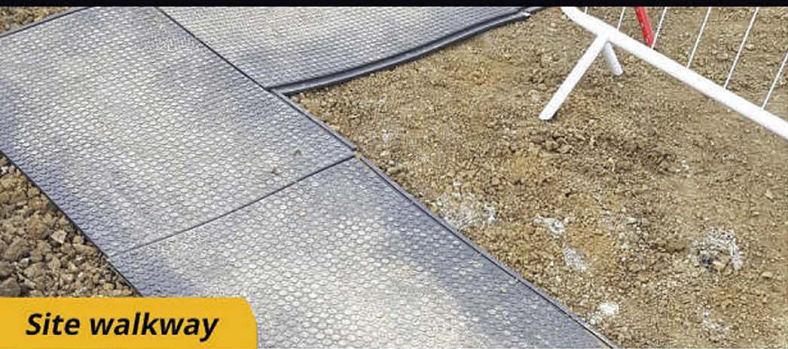

Site walkway




Fast and easy to join




Warehouse flooring



Ideal as a temporary construction site car park

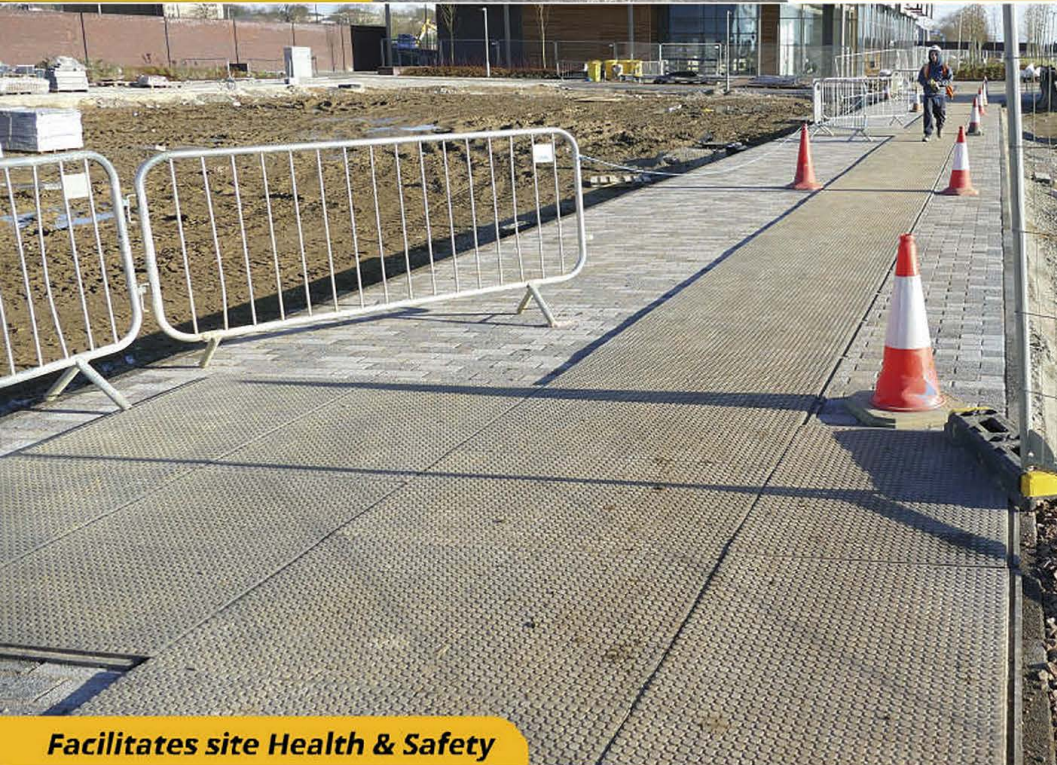

Facilitates site Health & Safety

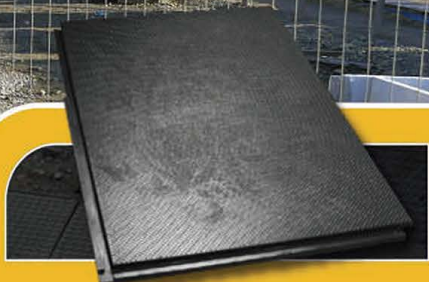

DIMENSIONS & WEIGHT

Length:.....	1200mm
Width:.....	800mm
Core Thickness:.....22mm	FC115
.....43mm	FC104
Weight:.....20kg	FC115
.....32kg	FC104

GroundGuards®

Distributor

 Scott Vickers Pte Ltd 48 Toh Guan Road East #02-102 Enterprise Hub Singapore 608586
tel: 6552 2933 fax: 6552 2955 sales@scottvickers.com.sg www.scottvickersgroup.com

info@ground-guards.co.uk
www.ground-guards.co.uk

Ground-Guards™

distributor



SCOTT VICKERS

48 Toh Guan Road East #02-102
Enterprise Hub Singapore 608586

t: 6552 2933 f: 6552 2955

e: sales@scottvickers.com.sg

w: scottvickersgroup.com